

Seaming tool PS55


For clamping and positioning components with a smooth surface



Simply better.



2

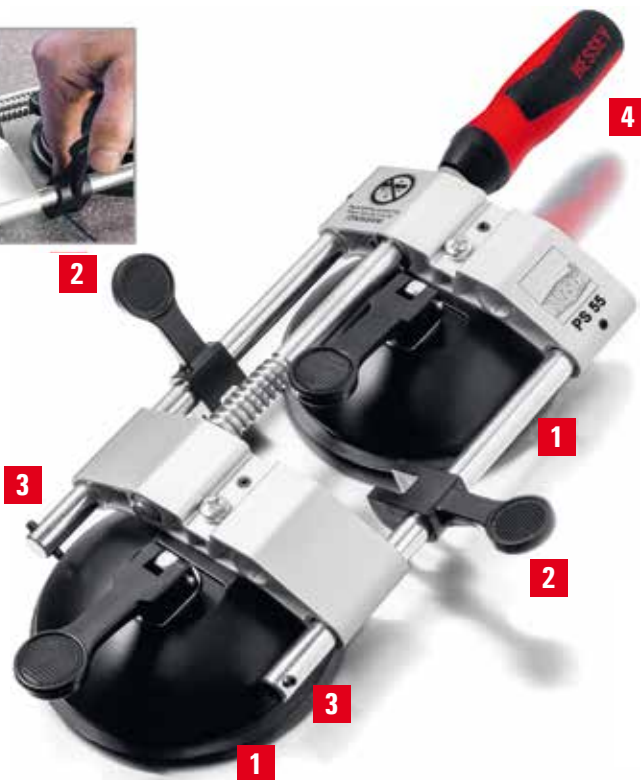

Your benefits at a glance:

1 Gentle suction cups

Easy to use. Engage the handle on the suction cups to generate a vacuum, and the seaming tool adheres automatically to the sheet.

2 Practical cam levers

The two levers on the guide bars can be used to easily control the height differences which can occur when pulling together the sheets.

3 Sturdy construction

Cold-drawn, electro-galvanised guide rods in sturdy aluminium profiles prevent the seaming tool from bending open during the clamping process and hold the seaming tool on one level. This guarantees a precise finished result.

4 Ergonomic plastic handle

With the perfect handle, you can achieve up to 260 N of clamping force in the horizontal plane. This need is met by the high-quality two-component plastic handle with easy-to-move trapezoidal thread spindle.




Seaming tool PS 55

| Order-No. | Opening | Width | Length | kg | V3 |
|-----------|---------|-------|--------|------|----|
| | mm | mm | mm | | |
| PS55 | 10-55 | 144 | 363 | 1.68 | |



- For clamping and positioning components with a smooth surface, such as ceramic, granite, Corian®, plastic, sheet metal and glass, which require low clamping forces (up to 260 N)
- Clamping levers on the suction cups ensure rapid handling
- Cam lever to compensate for differing heights at the joint

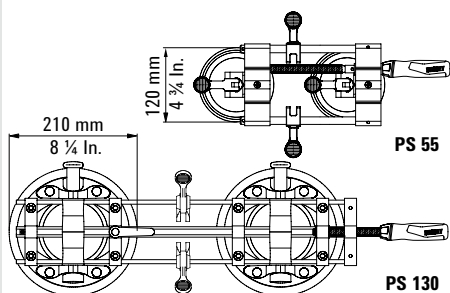

Corian® is a registered trademark of DuPont