

SIMPLY BETTER.

# Telescopic drywall supports range

**BESSEY**



# Efficient support, safe installation with up to 350 kg



## Extremely secure hold

The support guarantees a reliable and secure hold:

- due to robust design ensures a max load of 350 kg can be applied (dependent upon the size of support and length applied)
- due to rubber TPU contact surfaces top and bottom (9 x 7 cm)
- due to anti-slip system integrated in the grip



## Quick and accurate handling

The support can be precisely set to requirements, and safely released:

- due to fixing in three steps:
  1. In order to pre-set the telescopic drywall support press the release button and extend the telescopic inner tube to the desired length.
  2. Fine adjustment takes place by pressing the pump lever until the system plate of the support lies against the workpiece.
  3. Then turn the grip clockwise until the desired holding force is attained (observe the max. load-bearing capacity)
- due to releasing in two steps: First turn the telescopic drywall support anti-clockwise. As soon as no further holding force is present, press the release button to retract the inner tube.






### Telescopic drywall support STE with pump grip

	Order number	Adjusting range	Load limit at		Weight	PU	
			min. extension length	max. extension length			
		mm	kg	kg	kg	qty.	V3
NEW	STE55	400-550	350	350	1.42	2	
	STE90	575-910	350	350	1.80	2	
NEW	STE150	900-1500	350	210	2.29	2	
	STE250	1450-2500	350	160	3.30	2	
	STE300	1700-3000	350	110	3.80	2	
	STE370	2070-3700	350	65	4.50	2	

- Resilient up to a maximum of 3,500 N / 350 kg / 770 lbs when the telescopic rod is fully retracted
- Extremely stable construction due to highly durable steel pipes and non-slip TPU contact surfaces (9 x 7 cm)
- Single-handed operation thanks to 2-component plastic handle with pump mechanism
- Quick-slide button for rapid extension and retraction of the telescopic bar
- Controllable holding force by turning the support on the grip
- Application also on slopes due to continuously swivelling contact surfaces from -45° to +45°
- STE150, STE250, STE300, STE370: GS-certified for quality and safety

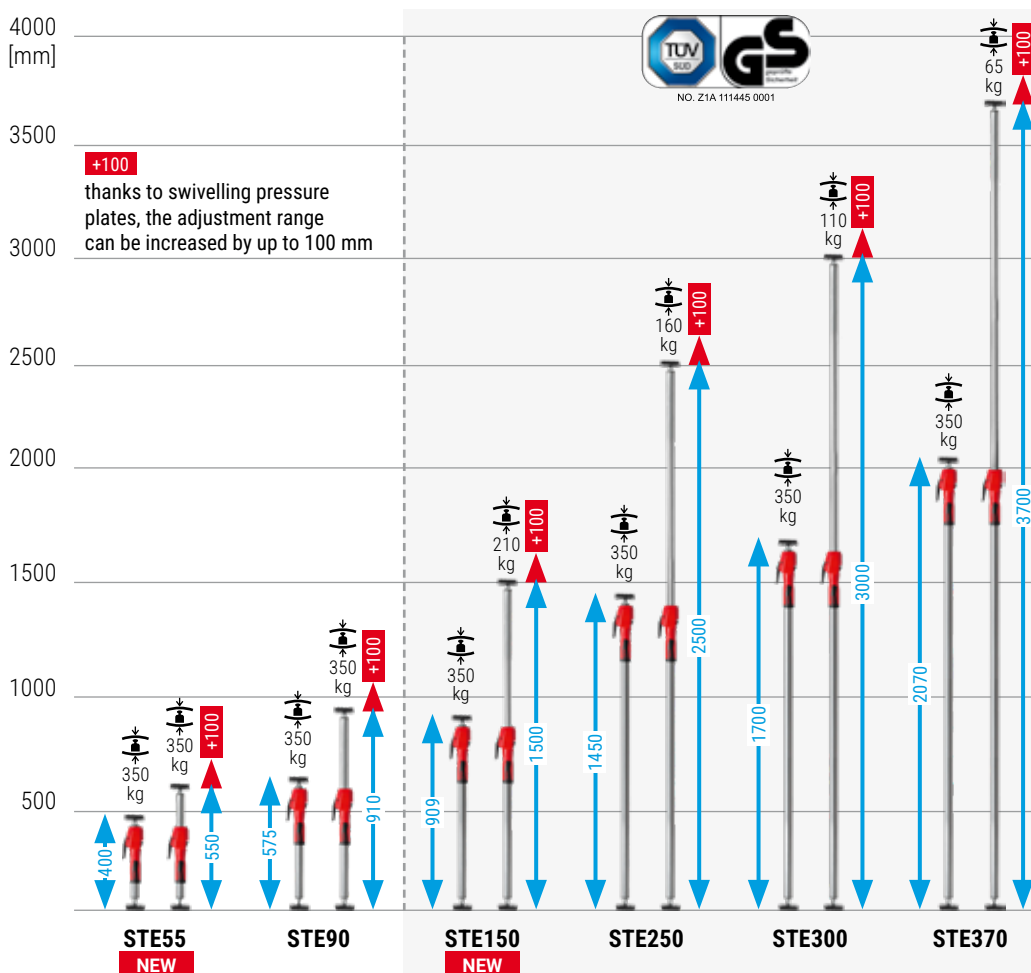



# Efficient support, safe installation with up to 150 kg



## Secure hold

Resilient and anti-slip, the support guarantees secure holding, even on sensitive surfaces:

- due to special steel pipes ensures a max load of 150 kg can be applied (dependent upon the size of support and length applied)
- due to additional locking of the release button
- due to rubber PVC contact surfaces top and bottom




## Easy to handle

The support can be used quickly:

- due to the fixing in just two steps:  
The rough pre-setting is carried out using the telescoping and quickly locking inner pipe; the final clamping is carried out by turning the support at the foam grip

## Telescopic drywall support ST

Order number	Adjusting range	Load limit at		Weight	PU	
		min. extension length	max. extension length			
	mm	kg	kg	kg	qty.	V3
ST125	750-1250	150	60	1.41	10	
ST250	1450-2500	150	60	2.06	10	
ST290	1600-2900	150	50	2.24	10	

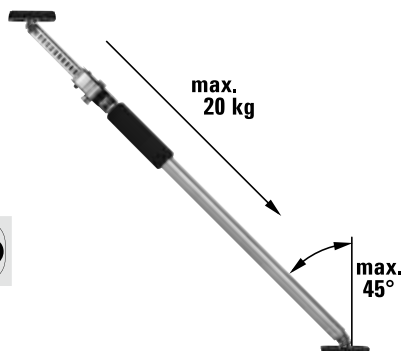

- Resilient up to a maximum of 150 kg when the telescopic rod is fully retracted
- Stable construction due to special steel pipes and anti-slip PVC contact surfaces (8,5 x 6,5 cm)
- Application also on slopes due to continuously swivelable contact surfaces of -45° to +45°
- Easy, safe handling due to a telescoping and locking inner pipe as well as an outer pipe that can be turned by the foam grip
- GS-certified for quality and safety



# Sophisticated accessories for even more applications



## Support plate STE-SP35



Order number	Length	Width	Height	Weight	PU	
	mm	mm	mm	kg	qty.	V3
STE-SP35	355	80	22	0.60	20	



- Light aluminium profile with non-slip cellular rubber
- For increasing the support surface of BESSEY ceiling and assembly supports ST (only in conjunction with replacement contact surface 3101952) and STE
- Application also on slopes due to continuously swivelling contact surfaces from -45° to +45°
- Secure fastening onto the contact surfaces thanks to star grip screws

## Replacement contact surface



Order number	Suitable for	Length	Width	Height	Weight	PU	
		mm	mm	mm	kg	qty.	V3
3101952	ST / STE	90	70	10	0.15	100	

## Ceiling tripod attachment STE-DS



Order number	Suitable for	Weight	PU	
		kg	qty.	V3
STE-DS	ST / STE	0.42	20	



- Accessory for ceiling supports with an outer diameter of the telescopic inner tube of 25 mm and 28 mm
- For increasing the support surface
- Even pressure thanks to the three-winged contact surfaces
- Quick, tool-free installation
- Safe to use as tipping of the contact surface is prevented by the all-round fixing of the steel pipe

### Construction tripod STE-BS



Order number	Suitable for	Weight	PU	
		kg	qty.	V3
STE-BS	ST / STE	1.66	10	



- Accessory for ceiling supports with an outer pipe diameter of 29 mm and 32 mm
- Stable stand as the force of the braced ceiling support acts downwards in places
- Ceiling supports can even be placed freely in the room without a top bracing and can therefore also be used outdoors
- Quick, tool-free installation
- Light and stable structure thanks to aluminium profiles and glass-fibre reinforced plastic

### NEW Small construction tripod STE-KBS



Order number	Suitable for	Weight	PU	
		kg	qty.	V3
STE-KBS	STE55 / STE90	0.27	12	



- Accessory for STE55 telescopic support
- Accessory for STE90 telescopic support as a smaller, space-saving alternative to the larger construction tripod STE-BS
- Telescopic support can be positioned upright even when untensioned and pre-positioning is made easier
- Non-slip protective caps to protect sensitive surfaces
- Quick, tool-free assembly
- Light and stable construction thanks to reinforced PA6 plastic

available from  
September 2025

### Combi-bag for ceiling supports STE-BAG



Order number	Suitable for	Weight	PU	
		kg	qty.	V3
STE-BAG	STE300 / STE370 / ST290	0.92	1	



- For convenient transport and protected storage of two BESSEY ceiling and installation supports STE300, STE370 and ST290 as well as accessories
- Comfortable thanks to the padded shoulder strap and the possibility to adjust the length of the bag to the ceiling supports to be placed within
- Easy to use due to the long zip-up case and four exterior pockets for additional storage space
- Durable material

### Multi-function/laser fixture STE-LH



Order number	Length	Width	Height	Weight	PU	
	mm	mm	mm	kg	qty.	V3
STE-LH	200	140	60	0.25	8	



- Accessory with 1/4" thread for holding a laser, camera etc
- Can be used without tools on round (0-45 mm) and angular (0-55 mm) support parts such as ceiling and assembly supports, profiles, ladders
- L-shaped rotating fixture with 2 rotation axes: 360° next to fixing clamp, 180° at threaded connection

### NEW Large multifunction fixture STE-MH-SET



available from  
October 2025

Order number	Suitable for	Load limit per mount	Con-tents	Weight	PU	
		kg	pc.	kg	qty.	V3
STE-MH-SET	ST / STE	50	2	0.80	10	



- Accessory for BESSEY telescopic supports STE (outer diameter 32 mm) and ST (outer diameter 29 mm)
- Fixture for the temporary assembly of partition walls and storage surfaces, e.g. tables, shelves
- Thanks to the 1/4" thread, also suitable for tools such as lasers (e.g. Stabila LAX 600G, Bosch GLL 3-80 CG), cameras and construction lights
- T-profile for the use of table clamps
- Quick, tool-free assembly
- Maximum load of 50 kg per fixture thanks to stable construction made of reinforced PA6 plastic and nonslip contact surface

### NEW Cross connector STE-CC-SET



available from  
October 2025

Order number	Suitable for	Load limit per mount	Con-tents	Weight	PU	
		kg	pc.	kg	qty.	V3
STE-CC-SET	ST / STE	30	2	0.62	10	



- Accessory for telescopic supports with an outer tube diameter of 20 mm to 34 mm
- Can be used for fastening cross connections, such as tubes, and as a temporary suspension option, e.g. for lamps, bicycles, etc.
- 360° flexible pre-positioning, which is held securely thanks to the 16-step latching mechanism
- Maximum load of 30 kg per connector thanks to stable construction made of reinforced PA6 plastic and nonslip contact surface



# Lifting, lowering or aligning with up to 180 kg




**1.800 N  
180 kg  
400 lbs**

## NEW One-handed lifting tool BEYCEPS BEY23

Order number	Utilisation area Lifting / Spreading <b>A</b>	Utilisation area Clamping <b>B</b>	Rail	Weight	PU	
	mm	mm	mm	kg	qty.	V3
BEY23	5–230	170–390	22 x 8	1.60	4	



Discover more >

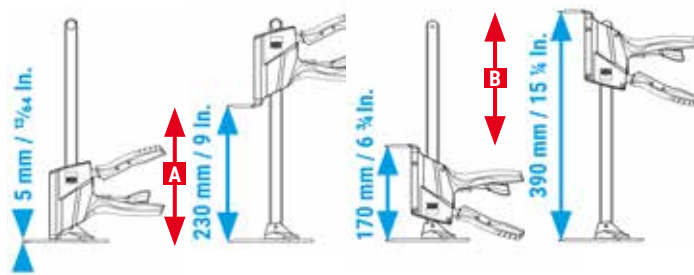


## NEW Installation kit BEYCEPS BEY-IK

Order number	Utilisation area Extension adapter <b>A</b>	Utilisation area Extension adapter + Rail unit <b>B</b>	Rail	Weight	PU	
	mm	mm	mm	kg	qty.	V3
BEY-IK	170–400	392–620	22 x 8	1.00	4	



available from  
July 2025

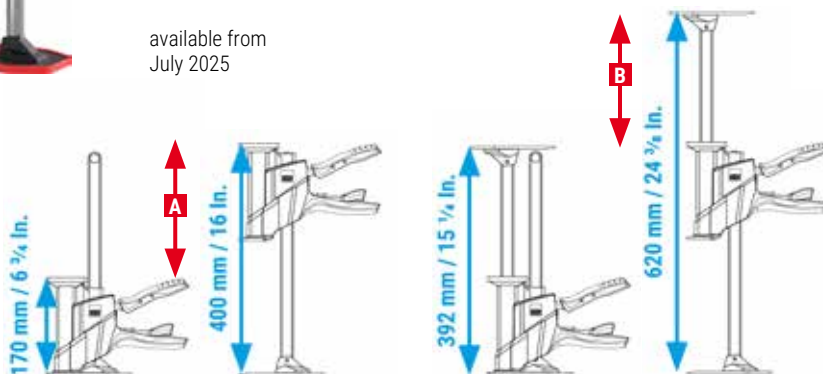

- Lifting force up to 1,800 N / 180 kg / 400 lbs
- For lifting (up to 8 mm per operation of the pump lever), lowering (up to 4 mm per operation of the lowering lever) and aligning workpieces with millimeter precision, gently and safely with just one hand
- Ergonomic and safe handling, as the pump lever made of 2-component plastic is positioned on the top and the two levers for fine lowering and releasing are arranged separately below it
- Closed plastic housing protects the mechanism from dust, dirt and chips and prevents fingers from getting trapped
- Can be converted without tools for clamping tasks
- Protective caps for stand and lifting plate – included in the scope of livery – prevent damage to sensitive surfaces
- CE labelling
- Two-piece accessory set consisting of extension adapter and rail unit for one-handed lifting tool BEYCEPS BEY23
- Load capacity of up to 60 kg for quick and precise assembly, e.g. wall cabinets, floating sideboards and bathroom furniture
- Quick, tool-free installation – only in conjunction with the extension adapter (usable range 170 mm to 400 mm) or additionally with rail unit (usable range 392 mm to 620 mm)
- Safe and gentle thanks to non-slip and scratchresistant protective caps

BESSEY Tool GmbH & Co. KG ■ Mühlwiesenstraße 40  
74321 Bietigheim-Bissingen, Germany  
Fon +49 7142 401-0 ■ Fax +49 7142 401-452  
E-Mail: tool-info@bessey.de

More information  
[www.bessey.de](http://www.bessey.de)



Your dealer: